


SPECIFICATIONS

Dallas Specialty Lg. Diameter Flexible Pipe Coupling for Sewer & Drain applications



Part# **DS06R-2424**

FITS: 24" RCP Reinforced Concrete Pipe x 24" CI/PVC Pipe
Part assembled with flexible bushings for reduction to 24" CI/PVC

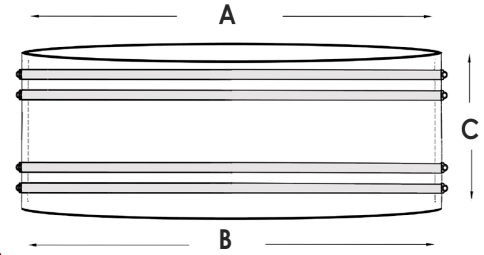

Coupling Made to ID Specifications

A SIDE (ID)	B SIDE (ID)	C SIDE HEIGHT
30.00"	24.80"	8.00"

Picture may not be actual coupling or part number, as some couplings may be reducing sized couplings with reduction on the exterior to achieve size reduction. For reference only



Constant Tension Banding used on 27" & larger couplings, providing 80"lb torque

Max Temp	140° degree F
Min Temp	-30° degree F
Pressure	Non-Pressure
Material	60/EPDM Rubber
Coupling Wall Thickness	1/2"

Install Torque	80in-lb torque
Meets ASTM	C 1173 / D 5926
Case Quantity	1 pc
Band Series	301SS/304SS Series SS
Clamps	Constant Tension Bands

Coupling & Bushing(s)

- Manufactured in the USA
- Meeting Material Requirements of IPC[®] / IRC[®]
- cUPC[®] Meets Canadian Standards
- ASTM C-1173 D-5926
- Sporadic Temperature Rating 140°
- Maximum Test Pressure 4.3 PSI



Clamps

- Constant Tension Bands: Qty 4 bands
1/2" Width AISI 301SS
- CT Band: Torque: 80in-lb Install Torque
- Band Screw: 3/8" Hex Head AISI 301SS
- Band Housing: AISI 304SS
- Meets Requirements: SAE J1670

Typical Properties	C-1173 spec	DS/605-60	ASTM#
Durometer Shore A, ±3 15sec	50-75	60	D-2240
Tensile Strength, PSI	1000	1525	D-412
Ultimate Elongation, %	200	363	D-412
Brittle Temperature Tb C°	-40	-40	D-746
Tear Strength	150in-lb	150in-lb	D-746



**DALLAS
SPECIALTY
& MFG CO.**

1161 RUGGLE ST. GRAND PRAIRIE, TX 75050
P: 972-641-8444 • 800-222-5644 • F: 972-641-8488
Email: ds@dalspc.com • www.dallasspecialty.com